



SELECT DISTRIBUTING, INC.


HVAC/R Copper Tubing Informational Sheet

HVAC/R COPPER TUBING

Select Distributing, Inc. copper tubing for HVAC/R applications is produced from the highest grade C12200 commercial copper tubing in a variety of OD sizes and meets the requirements ATSM B-280. It is a preferred material for use with most refrigerants. The tubing is normally furnished in soft temper coils with ends capped.

TECHNICAL SPECIFICATIONS COPPER

Copper	Temper	Lengths	Uses	Copper Tube Sizes	Refrigerants
C1220 DHP (phosphorous deoxidized, high residual phosphorous) Complies with ASTM B280 Cu minimum 99.90%	Light anneal	Available from 10' – 100'	Split system air conditioning	Liquid Line 1/4" – 5/8" Suction Line 3/8" – 1-1/8"	Suitable for R-22 R-410A R-134A R-502 R-404A

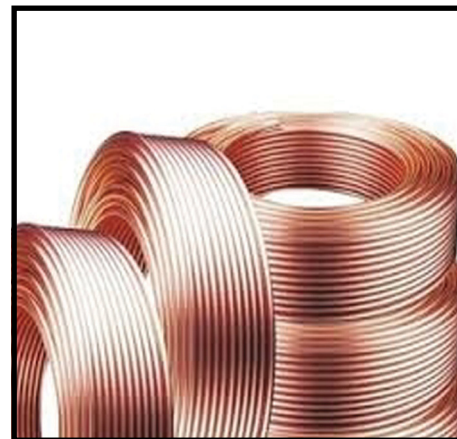

SELECT DISTRIBUTING, INC.

3875 Steele Street, Unit A • Denver, Colorado 80205 • www.sdidenver.com
Phone 720-570-7801 • Fax 720-570-7817